



HSF

NOTES:
 Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: LCP+30%G.F UL94V-0



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

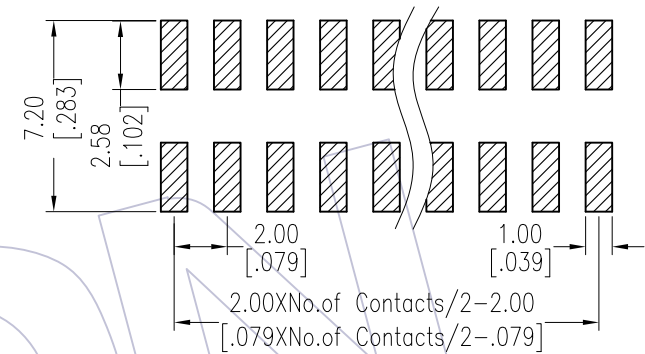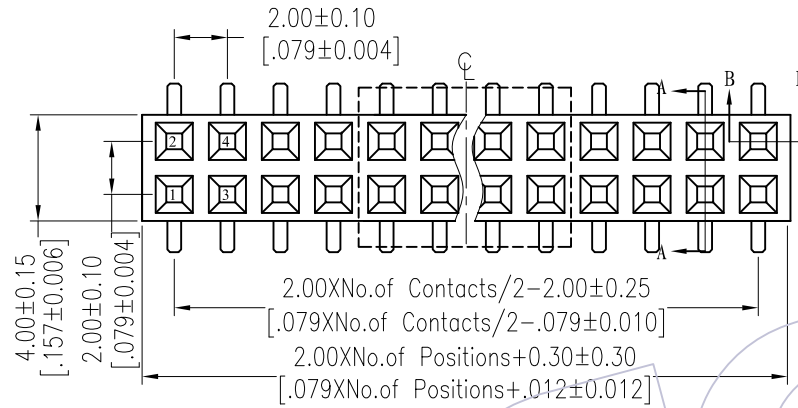

Ordering Information


2263D - 2 XX M XX D Y N X X

No. of Pins per ROW: 02-40PIN


Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin
 SM=Matte Tin

Insulator:
 D=LCP

Packing:
 T=Tube
 P=Tube+CAP
 R=Tape&Reel+CAP

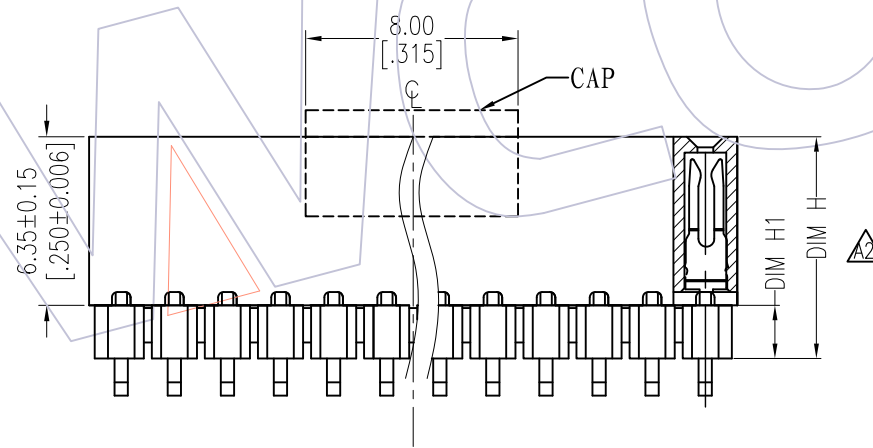

SECTION B-B

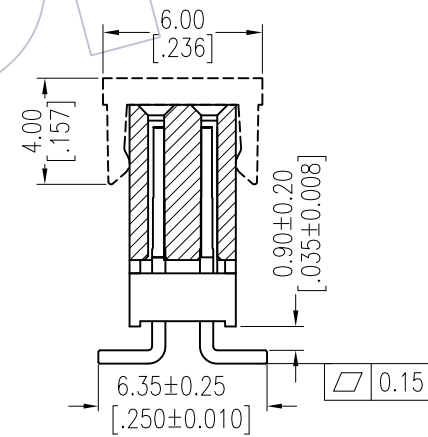

SECTION A-A

DIMENSION ANTITHESES LIST		
H1XN(N≤4)	DIM H	DIM H1
STANDARD		2.00
ALTERNATE		

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2015/02/06	Modify drawing	-----	x.x ±0.40	Wang	2015/02/06	UNIT	mm	2263D-2XXMXXDYNXX
A1	2013/04/26	Modify drawing	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: FH2.00mm DUAL ROW 180° SMT H=6.35
AO	2012/07/23	NEW	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com